(54) **Diffractive focussing means**

(57) A means for focussing radiation is provided which operates by diffraction but has only a single focal length, and comprises an array 10 of discontinuous arc portions concentric about an axis, the arc portions being opaque and other portions of the focussing means being transparent. The arc portions are such that the average amplitude-transmittance t around any complete circle of radius r centred on the axis varies sinusoidally e.g. according to the equation:

$$t = \tfrac{1}{2}\left(1 + \cos\left(\frac{2\pi r^2}{R^2} + b\right)\right)$$

where R and b are constants indicating the scale of the pattern. The means may be used to focus a wide range of radiations including visible light, X-rays, and neutrons, by appropriate choice of materials and scale.

Fig.1.

GB 2 252 843 A

Fig.1.

12

10

Fig.2.

12

r

O

R

P
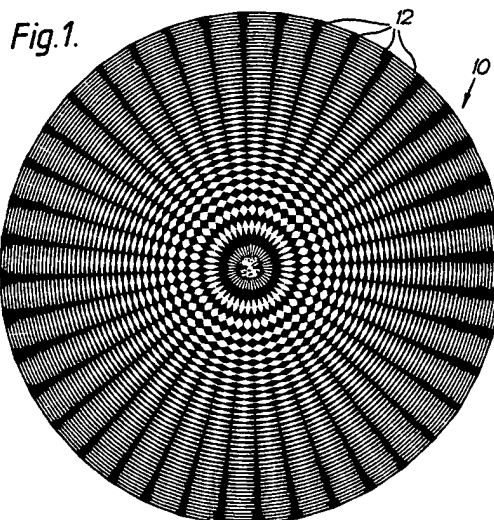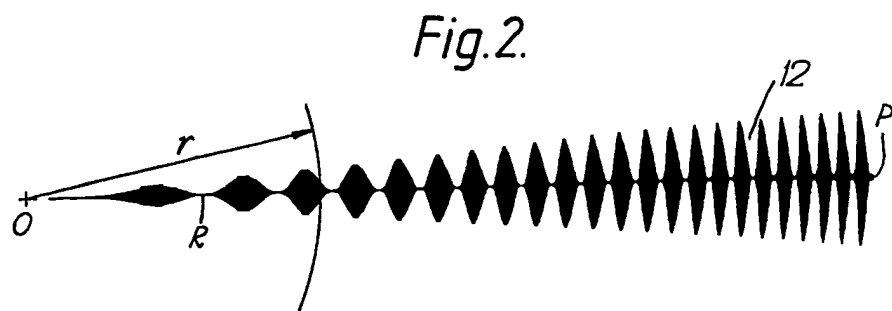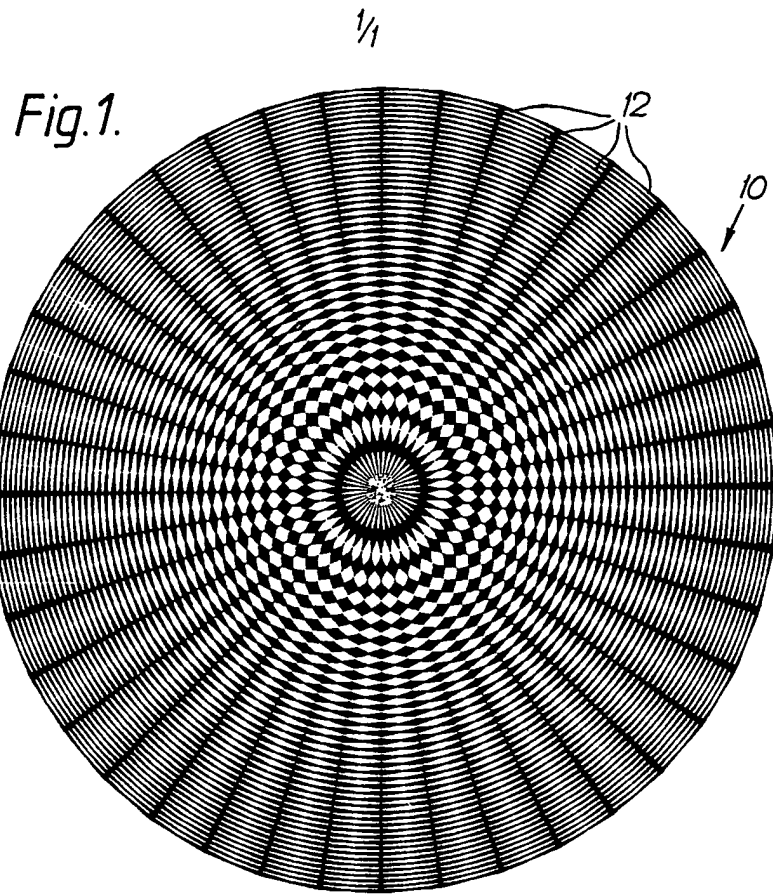
Focussing Means

The invention relates to means for focussing radiation, for example visible light or X-rays.

5

The use of lenses to focus light has been known for centuries, and lenses have the advantage of having only a single focal length, so clear bright images can be formed. However it is difficult to find suitable materials for some

10   types of radiation such as X-rays because the material has to be able to refract the radiation. Focussing means relying instead on diffraction are also known, for example the Fresnel zone plate consisting of concentric, alternately opaque and transparent annuli. This has the

15   disadvantage of having several different focal lengths so the images it can produce are not as sharp as those formed by a lens.

According to the present invention there is provided a

20   focussing means comprising an array of discontinuous arc portions concentric about an axis, the arc portions differing in their radiation transmission properties from other portions of the focussing means, the arc portions being such that the average amplitude-transmittance t

25   around any complete circle of radius r centred on the axis varies sinusoidally with the square of the radius r.

Preferably the amplitude-transmittance t varies according to the equation:

30

$$t = \tfrac{1}{2} \left(1 + \cos\left(\frac{2 \pi r^2}{R^2} + b\right)\right)$$

where R and b are constants for a particular focussing

35   means. The arc portions are preferably opaque whereas the other portions are transparent to the radiation to be

focussed. The focussing means has a single focal length f
given by:

$$f = \frac{R^2}{2\lambda}$$

5

where λ is the wavelength of the radiation. Hence the
wavelength, in conjunction with the desired focal length,
determine the value of the parameter R, and hence the scale
10 of the array.

Preferably the array has rotational symmetry about the
axis, and preferably at any particular radius r all the arc
lengths are equal.

15

The focussing means may be used to focus a wide
variety of different forms of radiation. For visible light
the arc portions may for example be opaque portions of a
photographic emulsion supported on a transparent glass
20 plate. Alternatively they may comprise a thin metal
coating on a glass plate, the remainder of the coating
being removed by chemical etching. Similar methods of
manufacture enable focussing means for use with infra-red
or ultra-violet radiation to be made. For microwaves the
25 arc portions might be of copper, supported on a
non-conducting plate. For X-rays a nanometre-scale etching
process might be used to form the arc portions in a
material having a strong absorption edge at or near the
wavelength to be focussed. Similarly, for focussing
30 neutrons, a foil of gadolinium or another suitable absorber
may be etched to form the arc portions, supported on a film
of non-absorbing plastics material.

Although in the ideal embodiments the arc portions
35 would be totally opaque and the other portions totally
transparent, nevertheless as long as the amplitude-

transmittance varies with the radius in the specified fashion the focussing means will still operate to bring at least part of the incident radiation to a focus.

5   The invention will now be further described by way of example only and with reference to the accompanying drawings, in which:

Figure 1   shows an array of arc portions for use as a
10   focussing means; and

Figure 2   shows to a larger scale part of the array of
               Figure 1.

15   Referring to Figure 1 there is shown an array 10 or pattern forming a focussing means. The array 10 is shown in black and white, the black representing opaque portions and the white representing transparent portions. The array 10 consists of forty identical sectors 12, each of angular
20   width 9 degrees. The array 10 hence has rotational symmetry about its centre. Along a radial line there are forty black portions between the centre and the periphery of the array 10, so the focussing means may be described as having forty zones.

25

Referring to Figure 2 there is shown, to a larger scale, part of a single sector 12 of the array 10. The centre of the array 10 is indicated by O, and the centre-line of the sector 12, i.e. a radial line, is
30   indicated by O-P. Only twenty-three zones are shown in Figure 2. At a radius r is a black (opaque) arc portion bisected by the line OP and of length L given by:

$$L = \left(\frac{2 \pi r}{40} \right) \times \left[\frac{1}{2} \left(1 - \cos \frac{2 \pi r^2}{R^2} \right) \right]$$

35

The first factor is merely the arc length of the
sector 12 at a radius r, while the second factor varies
sinusoidally between zero and one. The parameter R
determines the scale of the pattern, as it corresponds to
5   the radius at which the arc length first returns to zero,
on moving outward from the centre O.

Since the black arc portions are opaque whereas the
remainder of the array 10 is transparent, the
10   amplitude-transmittance t, averaged around a complete
circle of radius r, is given by one minus the second factor
in the above equation, i.e.:

$$t = \tfrac{1}{2}\left(1 \;+\; \cos \frac{2\pi r^2}{R^2}\right)$$

15

For use with visible light the array 10 of Figure 1
would be of overall diameter for example between 4 mm and
20 mm, for example 6.5 mm, and might comprise photographic
20   emulsion on a glass support. If the overall diameter is
6.5 mm the parameter R would have the value 0.51 mm. If
used with green light of wavelength 500 nm then it will
have a focal length:

25        $f = \dfrac{R^2}{2\lambda} = 0.26\ m$

Such a focussing means has been found able to resolve as
many as 30 to 40 line pairs per mm, when used to photograph
30   test objects.

For use with infra-red radiation the array 10 of
Figure 1 might be of overall diameter for example 50 mm,
and be etched in a 30 micron thick nickel film on a silicon
35   substrate.

It will be appreciated that the pattern used in a
focussing means of the invention may differ from that
described above. For example the number of sectors 12
might differ, or alternatively the number of sectors in one
5 annular region, for example the outer half of the pattern,
might be greater than that in the remainder of the pattern.
It will be appreciated that the opaque arc portions within
a sector 12, instead of being bisected by the radial line
OP, might all have one end starting at a radial line. The
10 sectors might not be defined between equally spaced radial
lines but instead lie between equally spaced curved (part
spiral) lines. There is also no necessity for all the
sectors to be of the same width, and indeed the pattern of
opaque arc portions may differ from sector to sector.
15

Furthermore, instead of the pattern being transparent
at the centre O, it might be opaque at the centre,
throughout the pattern the opaque and transparent portions
being reversed; this corresponds to a change of phase of π
20 radians compared to the equation for the transmittance t of
the array 10. Indeed the pattern might have a radial
variation of transmittance t differing from that of the
array 10 by any desired phase angle between zero and 2π
radians.
25

It will be appreciated that it may prove difficult to
make the desired pattern as discussed above, particularly
at large values of radius where successive zones are very
narrow. To minimize this problem the pattern may be
30 simplified for the outermost zones with little detrimental
effect on the focussing properties of the array. For
example the sinusoidal variations in arc length might be
simplified to a triangular variation, or a stepped
variation.
35

   By way of example, a focussing means of the invention
suitable for use with X-rays might be used for
holographically imaging X-rays or gamma rays, so enabling
the geometry of the source to be determined. Again, a
5   focussing means of the invention suitable for use with
microwaves might be used instead of a reflector for
focussing satellite signals onto a detector, either for
television or telecommunication reception.

Claims

1. A focussing means comprising an array of discontinuous arc portions concentric about an axis, the arc portions
5 differing in their radiation transmission properties from other portions of the focussing means, the arc portions being such that the average amplitude-transmittance t around any complete circle of radius r centred on the axis varies sinusoidally with the square of the radius r.
10

2. A focussing means as claimed in Claim 1 wherein

the amplitude-transmittance t varies according to the equation:
15

$$t = \tfrac{1}{2}\left(1 + \cos\left(\frac{2\pi\,r^2}{R^2} + b\right)\right)$$

3. A focussing means as claimed in Claim 1 or Claim 2
20 wherein the arc portions are opaque whereas the other portions are transparent to the radiation to be focussed.

4. A focussing means as claimed in any one of the preceding Claims wherein the array has rotational symmetry
25 about the axis.

5. A focussing means as claimed in any one of the preceding Claims wherein at any particular radius in all the arc lengths are equal.
30

6. A focussing means substantially as hereinbefore described with reference to, and as shown in, the accompanying drawings.

35

P.T. Mansfield

P.T. Mansfield
Chartered Patent Agent
Agent for the Applicants

14712 MdH

Name	Size	Modified	Comment
GB/I000000A/IM0225V2/022528D1/0225284...		10/8/2003 12:39 PM	
GB/I000000A/IM0225V2/022528D1/0225284...		10/8/2003 12:39 PM	
GB/I000000A/IM0225V2/022528D1/0225284...		10/8/2003 12:39 PM	
GB/I000000A/IM0225V2/022528D1/0225284...		10/8/2003 12:39 PM	
GB/I000000A/IM0225V2/022528D1/0225284...		10/8/2003 12:39 PM	
GB/I000000A/IM0225V2/022528D1/0225284...		10/8/2003 12:39 PM	
GB/I000000A/IM0225V2/022528D1/0225284...		10/8/2003 12:39 PM	
GB/I000000A/IM0225V2/022528D1/0225284...		10/8/2003 12:39 PM	
GB/I000000A/IM0225V2/022528D1/0225284...		10/8/2003 12:39 PM	
GB/I000000A/IM0225V2/022528D1/0225284...		10/8/2003 12:39 PM	
GB/I000000A/IM0225V2/022528D1/0225284...		10/8/2003 12:39 PM	
INVOICE.HTM	179	10/8/2003 12:38 PM	
STATUS.HTM	121	10/8/2003 12:38 PM	
TRANS.IDX	1,122	10/8/2003 12:39 PM	

Category	Identity of document and relevant passages	Relevant to claim(s)

Categories of documents

X: Document indicating lack of novelty or of inventive step.

Y: Document indicating lack of inventive step if combined with one or more other documents of the same category.

A: Document indicating technological background and/or state of the art.

P: Document published on or after the declared priority date but before the filing date of the present application.

E: Patent document published on or after, but with priority date earlier than, the filing date of the present application.

&: Member of the same patent family, corresponding document.

Databases: The UK Patent Office database comprises classified collections of GB, EP, WO and US patent specifications as outlined periodically in the Official Journal (Patents). The on-line databases considered for search are also listed periodically in the Official Journal (Patents).